


Camp Precast "MicroFAST 0.5L" with 1,000 Gallon Pump Station

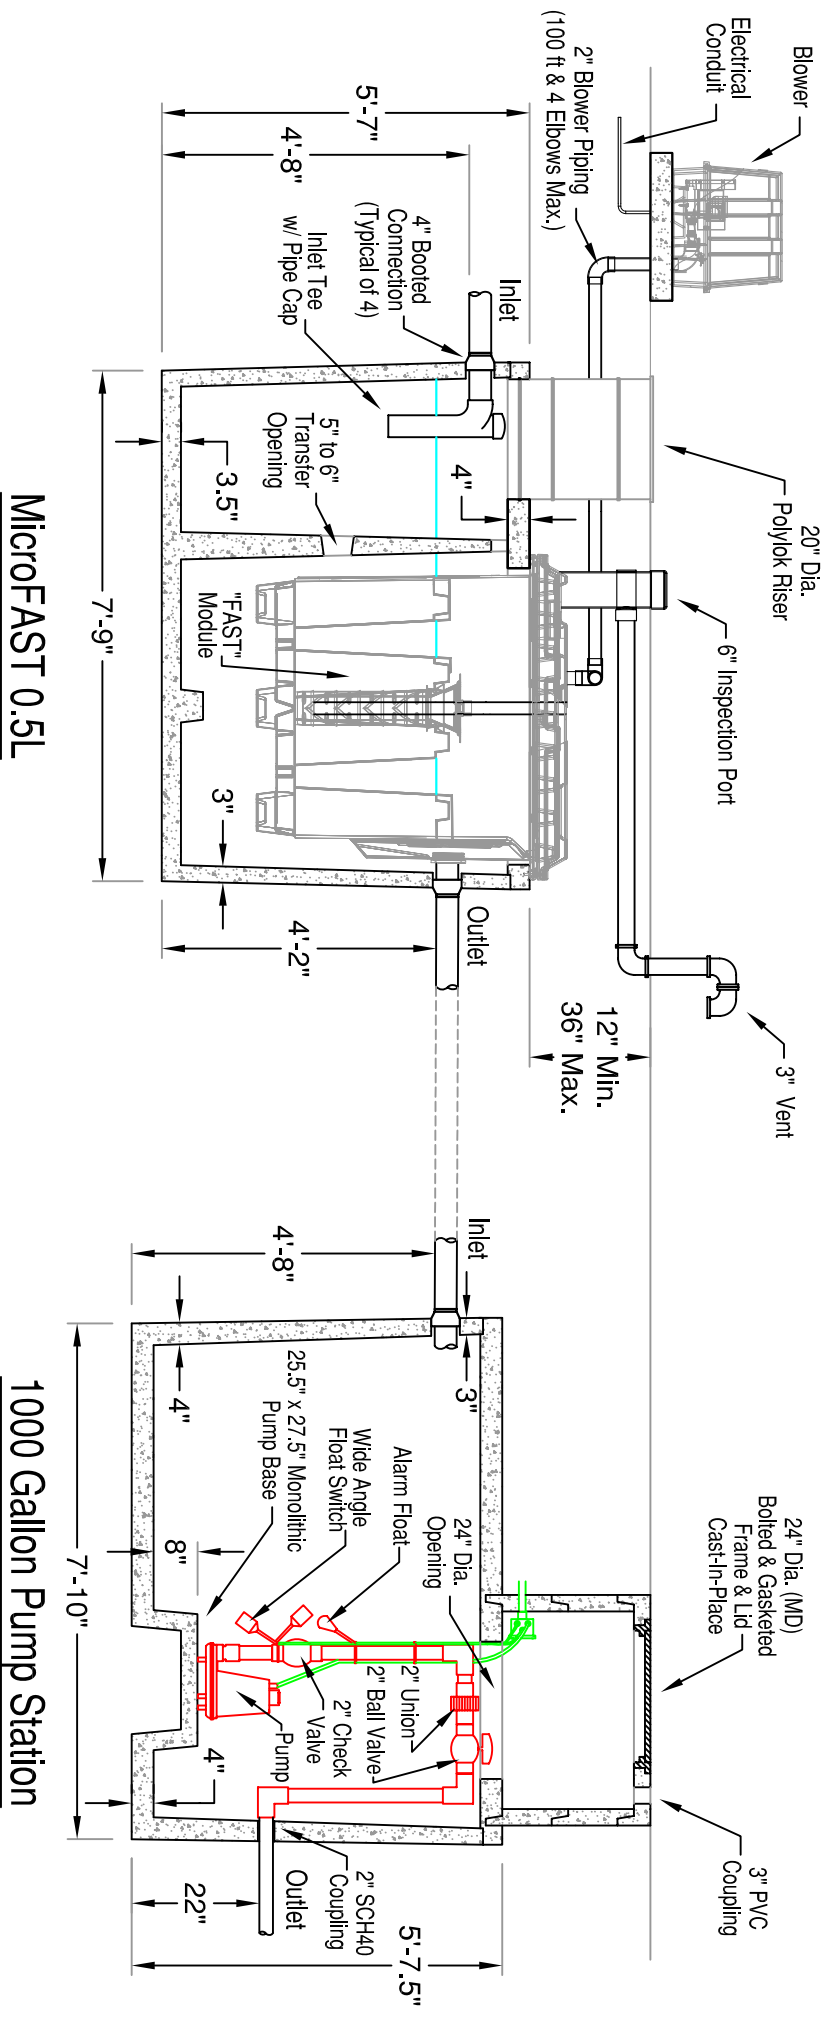

MicroFAST 0.5L


1000 Gallon Pump Station

MicroFAST 0.5L SPECIFICATIONS:

MicroFast 0.5L package to be supplied by Camp Precast Concrete Products, Inc. (802-893-2401)
 Precast Concrete Tank to be "top seam" with integrally cast watertight booted pipe connections (pipe seals are not acceptable); tank shall have an integrally cast 20" diameter tank riser cast on inlet end of tank. Tank to be manufactured in an NPCA Certified Plant using 5000 psi concrete and for reasons of permeability and durability, concrete to have a water/cement ratio no greater than 0.43. Tank and tank lid to have proof of design testing done and on file at the manufacturer's plant. Tank to be water tested with no visible leakage allowed.

1000 Gallon Final Discharge Pump Station SPECIFICATIONS:

1000 Gallon Final Discharge, Precast Concrete Packaged Pump Station to be supplied by Camp Precast Concrete Products, Inc. (802-893-2401). Precast Concrete Pump Station to be "top seam" with three integrally cast watertight booted pipe connections for 4" inlets (pipe seals are not acceptable), one 2" PVC Coupling cast-in wall of tank for force main discharge. Coupling to be cast-in 22" up from outside bottom. Top of pump tank to have an integrally cast 36" diameter x 12" high access riser section cast over pump with a precast concrete access cover with a flush mounted, bolted and gasketed frame and lid and a 3" PVC vent pipe with an odor reduction vent cap. Pump Station tank to be manufactured in an NPCA Certified Plant using 5000 psi concrete and for reasons of permeability and durability, concrete to have a water/cement ratio no greater than 0.43. Tank and tank lid to have proof of design testing done and on file at the manufacturer's plant. Tank to be water tested with no visible leakage allowed.

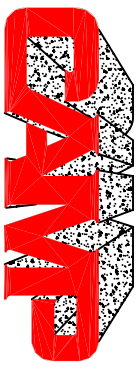

PRECAST CONCRETE PRODUCTS
 78 PRECAST ROAD MILTON, VT 05468 - 802.893.2401
 TOLL FREE 1.888.299.2401 FAX 802.893.1542