
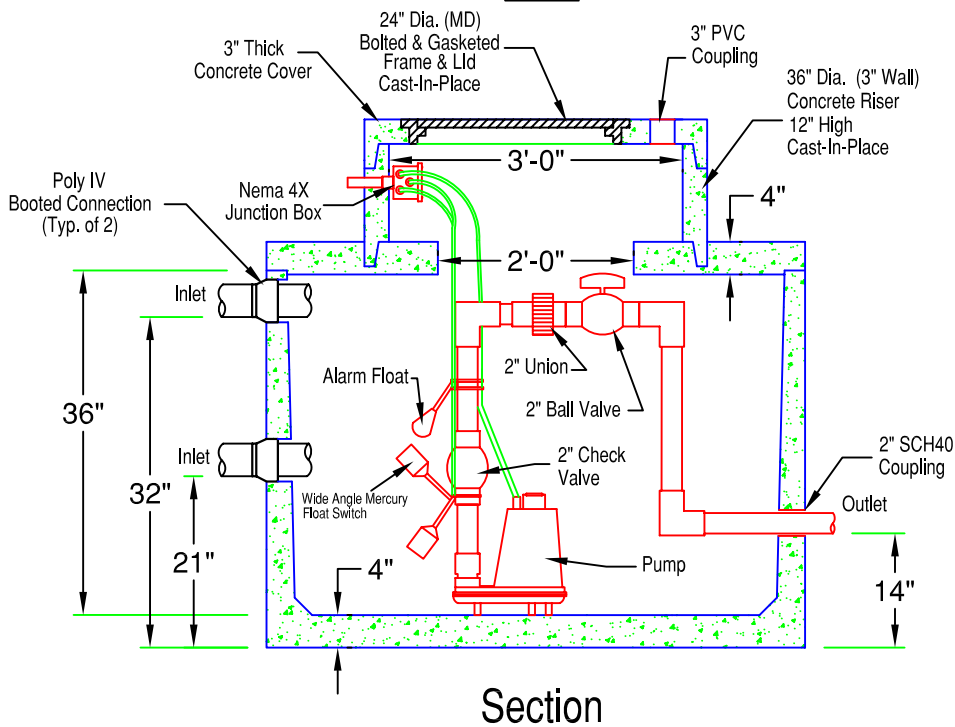


Precast Pumpstation / PEAT

5' x 5' (500PS)

Total Weight : 6,070 lbs

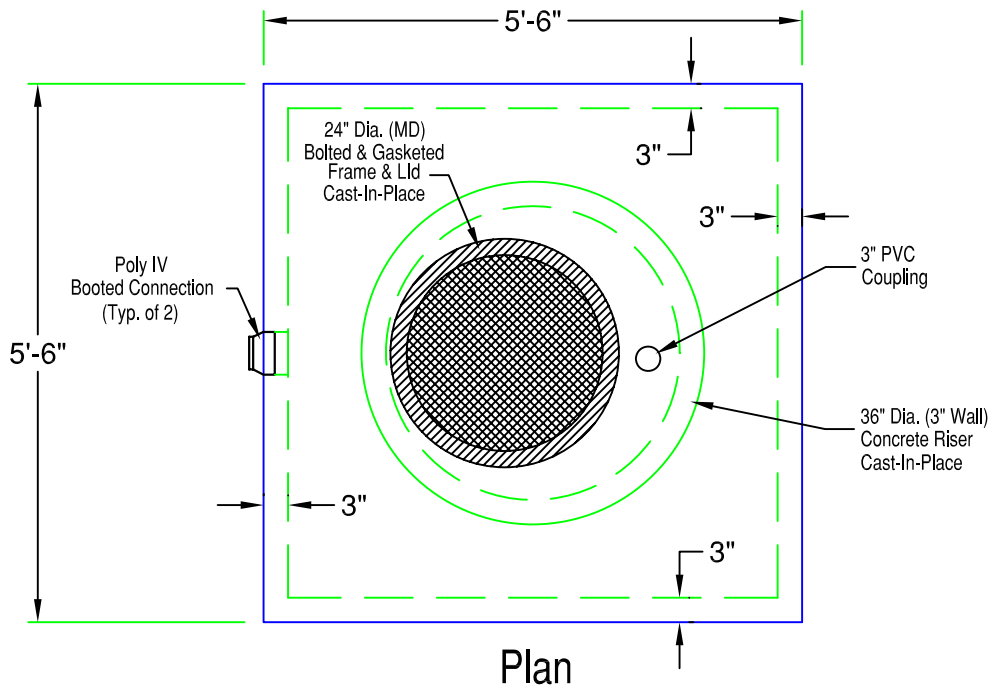

SPECIFICATIONS:

- Concrete Minimum Strength 5000psi @ 28 days
- Steel Reinforcement Grade 60
- Joints sealed with Butyl sealant
- Top Seam Construction
- Poly IV Booted Connections
- Weights Subject to Variation



PRECAST CONCRETE PRODUCTS

78 PRECAST ROAD MILTON, VT 05468 +802.893.2401
TOLL FREE 1.888.299.2401 FAX 802.893.1542