1000 Gal. 2-Compartment Water-Proof Septic Tank with Orenco Effluent Filter / Alarm (1000STL2CWF44A)

Total Weight : 9,640 lbs

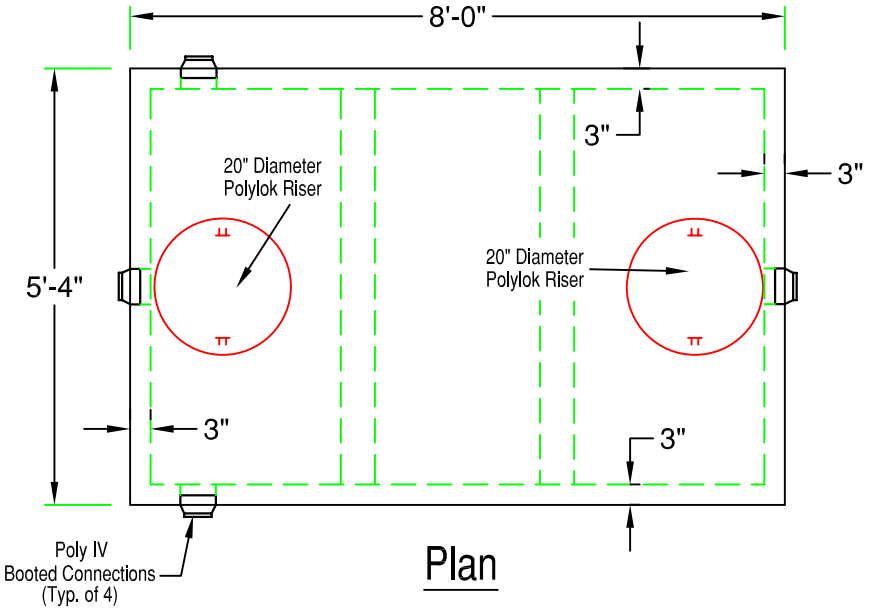

Plan

Note:
Water Testing
Available

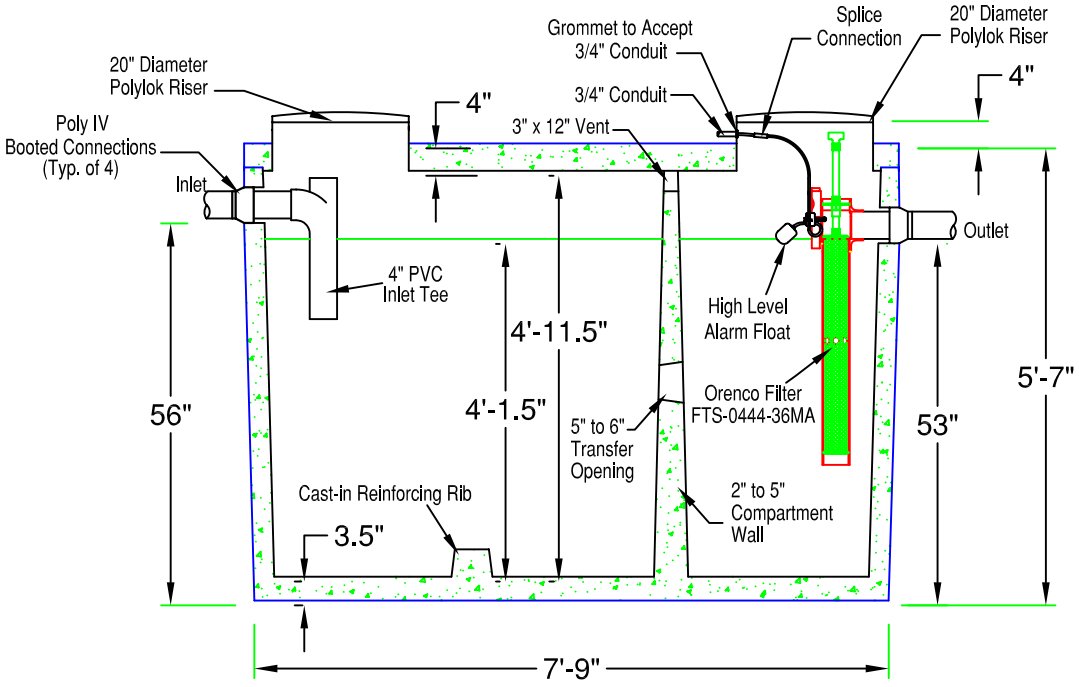

Section

SPECIFICATIONS:

- Concrete Minimum Strength 5000psi @ 28 days
- Steel Reinforcement Grade 60
- Top Seam Construction
- Water Tight to Top of Concrete
- Booted Pipe Connections
- Weights Subject to Variation

PRECAST CONCRETE PRODUCTS
78 PRECAST ROAD MILTON, VT 05468 •802.893.2401
TOLL FREE 1.888.299.2401 FAX 802.893.1542