


# 6' x 12' Light Duty Tank (Pump Station)

1,000 - 3,500 Gallon (LD6-12)

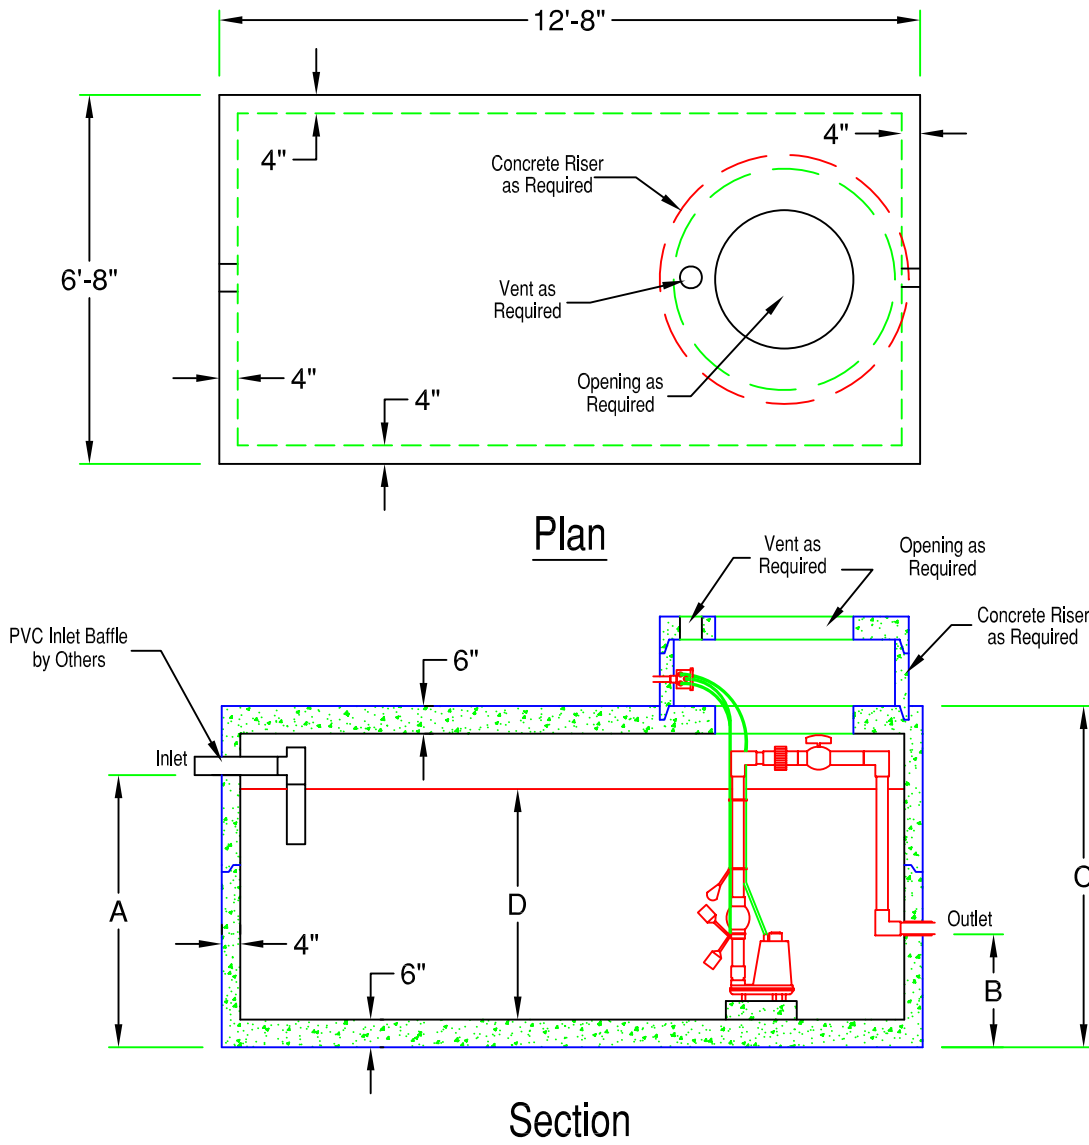

	Model	Tank Capacity	Inlet (A)	Outlet (B)	Height (C)	Liquid (D)	Weight
*	HD6-12-1000	1000 gallon	32"	As Required	49"	23"	18,200 lb
*	HD6-12-1500	1500 gallon	43"	As Required	57"	34"	19,590 lb
	HD6-12-2000	2000 gallon	54"	As Required	72"	45"	21,900 lb
	HD6-12-2500	2500 gallon	65"	As Required	80"	56"	23,140 lb
	HD6-12-3000	3000 gallon	76"	As Required	92"	67"	24,960 lb
	HD6-12-3500	3500 gallon	87"	As Required	101"	78"	26,380 lb

## SPECIFICATIONS:

- Concrete Minimum Strength 5000psi @ 28 days
- Steel Reinforcement Grade 60
- Joints Sealed with Butyl Sealant
- Inlet and Outlet Baffles by Others
- (\*) Denotes Top Seam Construction
- Weights Subject to Variation



**PRECAST CONCRETE PRODUCTS**  
 78 PRECAST ROAD MILTON, VT 05468 •802.893.2401  
 TOLL FREE 1.888.299.2401 FAX 802.893.1542